

# VPAT™

## Voluntary Product Accessibility Template®

Version 1.3

The purpose of the **Voluntary Product Accessibility Template**, or **VPAT™**, is to assist Federal contracting officials and other buyers in making preliminary assessments regarding the availability of commercial “Electronic and Information Technology” products and services with features that support accessibility. It is assumed and recommended that offerers will provide additional contact information to facilitate more detailed inquiries.

The first table of the Template provides a summary view of the Section 508 Standards. The subsequent tables provide more detailed views of each subsection. There are three columns in each table. Column one of the Summary Table describes the subsections of subparts B and C of the Standards. The second column describes the supporting features of the product or refers you to the corresponding detailed table, e.g., “equivalent facilitation.” The third column contains any additional remarks and explanations regarding the product. In the subsequent tables, the first column contains the lettered paragraphs of the subsections. The second column describes the supporting features of the product with regard to that paragraph. The third column contains any additional remarks and explanations regarding the product.

---

**Date:** September 30, 2013

**Name of Product:** Arista Networks 7048T, 7050T, 7050 S/Q, 7150S, 7124FX, 7500E

**Contact for more Information (name/phone/email):** Bob Andersen / 703-628-2958 / bobander@aristanetworks.com

### *Summary Table*

## VPAT™

## Voluntary Product Accessibility Template®


<i>Criteria</i>	Supporting Features	Remarks
-----------------	---------------------	---------

		<b>and explanations</b>
Section 1194.21 <a href="#">Software Applications and Operating Systems</a>	Included	The Arista Networks switches use an Extensible Operating System (EOS), an operating system designed for Data Center class Ethernet switches. The product line uses a command line interface (CLI) which is built into the operating system. The CLI is inherently 508 conformant as the CLI is text based and relies on a keyboard for navigation. All functions of the switch can be configured and monitored through the CLI.
Section 1194.22 <a href="#">Web-based Internet Information and Applications</a>	Not Applicable	
Section 1194.23 <a href="#">Telecommunications Products</a>	Not Applicable	
Section 1194.24 <a href="#">Video and Multi-media Products</a>	Not Applicable	
Section 1194.25 <a href="#">Self-Contained,</a>	Included	The

<a href="#">Closed Products</a>		Management tools that are used to configure, operate and manage the Ethernet switches are inherently 508 compliant as a combination of text based commands or point and click using either a keyboard or pointing device ( computer mouse) for navigation.
Section 1194.26 <a href="#">Desktop and Portable Computers</a>	Not Applicable	
Section 1194.31 <a href="#">Functional Performance Criteria</a>	Included	
Section 1194.41 <a href="#">Information, Documentation and Support</a>	Included	

The Arista Networks hardware Ethernet switches are considered exempt from Section 508 because of the 1194.3(f) Back Office Exemption clause. Products located in spaces frequented only by service personnel for maintenance, repair, or occasional monitoring of equipment are not required to be compliant with section 508. The following Arista Network products are considered back office equipment.

Arista Networks 7048T, 7050T, 7050 S/Q, 7150S, 7124FX, 7500E

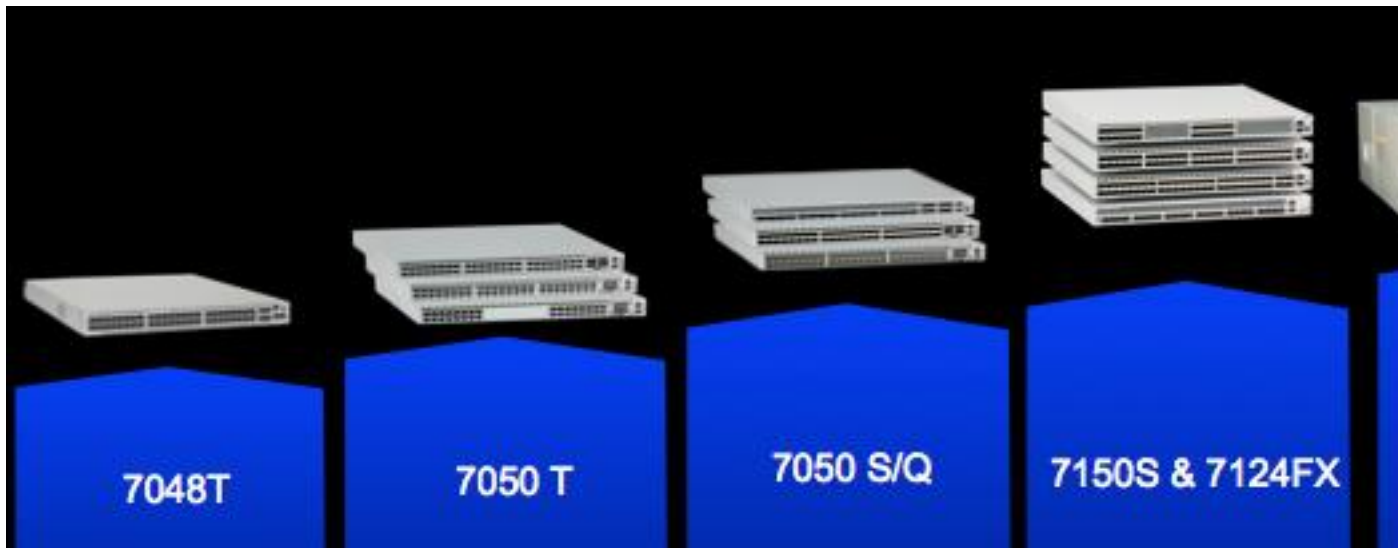

URL for Arista Networks Ethernet switches is:  
<http://www.aristanetworks.com/en/products/>

The software used to configure and administer the Arista Networks Ethernet switches is not exempt from Section 508 compliance. The remote configuration and management is done through the Command Line Interface built in to the Extensible Operating System

[Return to the top of the page.../AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html](#)

## ***Section 1194.21 Software Applications and Operating Systems – Detail***

**VPAT™**

**Voluntary Product Accessibility Template®**

<b>Criteria</b>	<b>Supporting Features</b>	<b>Remarks and explanations</b>
(a) When software is designed to run on a system that has a keyboard, product functions shall be executable from a keyboard where the function itself or the result of performing a function can be discerned textually.	Supports	CLI provides keyboard access
(b) Applications shall not disrupt or disable activated features of other products that are identified as accessibility features, where those features are developed and documented according to industry standards. Applications also shall not disrupt or disable activated features of any operating system that are identified as accessibility features where the application programming interface for those accessibility features has been documented by the manufacturer of the operating system and is available to the product developer.	Supports	
(c) A well-defined on-screen indication of the current focus shall be provided that moves among interactive interface elements as the input focus changes. The focus shall be programmatically exposed so that Assistive Technology can track focus and focus changes.	Supports	CLI provides initial / keyboard focus
(d) Sufficient information about a user interface element including the identity, operation and state of the element shall be available to Assistive Technology. When an image represents a program element, the information conveyed by the image must also be available in text.	Supports	CLI is text based
(e) When bitmap images are used	Not Applicable	No images or

to identify controls, status indicators, or other programmatic elements, the meaning assigned to those images shall be consistent throughout an application's performance.		graphical elements are used in the CLI
(f) Textual information shall be provided through operating system functions for displaying text. The minimum information that shall be made available is text content, text input caret location, and text attributes.	Supports	CLI is text based
(g) Applications shall not override user selected contrast and color selections and other individual display attributes.	Supports	Dependent on application used to access CLI
(h) When animation is displayed, the information shall be displayable in at least one non-animated presentation mode at the option of the user.	Not Applicable	No animation in the CLI
(i) Color coding shall not be used as the only means of conveying information, indicating an action, prompting a response, or distinguishing a visual element.	Supports	CLI is text based and color is not used
(j) When a product permits a user to adjust color and contrast settings, a variety of color selections capable of producing a range of contrast levels shall be provided.	Supports	Dependent on application used to access CLI
(k) Software shall not use flashing or blinking text, objects, or other elements having a flash or blink frequency greater than 2 Hz and lower than 55 Hz.	Not Applicable	No instance of blinking or flashing in CLI
(l) When electronic forms are used, the form shall allow people using Assistive Technology to access the information, field elements, and functionality required for completion and submission of the form, including all directions and cues.	Not Applicable	No instances of electronic forms

**Section 1194.22 Web-based Internet information and applications – Detail**

**VPAT™**

**Voluntary Product Accessibility Template®**

<b>Criteria</b>	<b>Supporting Features</b>	<b>Remarks and explanations</b>
(a) A text equivalent for every non-text element shall be provided (e.g., via "alt", "longdesc", or in element content).	Not Applicable	
(b) Equivalent alternatives for any multimedia presentation shall be synchronized with the presentation.	Not Applicable	
(c) Web pages shall be designed so that all information conveyed with color is also available without color, for example from context or markup.	Not Applicable	
(d) Documents shall be organized so they are readable without requiring an associated style sheet.	Not Applicable	
(e) Redundant text links shall be provided for each active region of a server-side image map.	Not Applicable	
(f) Client-side image maps shall be provided instead of server-side image maps except where the regions cannot be defined with an available geometric shape.	Not Applicable	
(g) Row and column headers shall be identified for data tables.	Not Applicable	
(h) Markup shall be used to associate data cells and header	Not Applicable	

cells for data tables that have two or more logical levels of row or column headers.		
(i) Frames shall be titled with text that facilitates frame identification and navigation	Not Applicable	
(j) Pages shall be designed to avoid causing the screen to flicker with a frequency greater than 2 Hz and lower than 55 Hz.	Not Applicable	
(k) A text-only page, with equivalent information or functionality, shall be provided to make a web site comply with the provisions of this part, when compliance cannot be accomplished in any other way. The content of the text-only page shall be updated whenever the primary page changes.	Not Applicable	
(l) When pages utilize scripting languages to display content, or to create interface elements, the information provided by the script shall be identified with functional text that can be read by Assistive Technology.	Not Applicable	
(m) When a web page requires that an applet, plug-in or other application be present on the client system to interpret page content, the page must provide a link to a plug-in or applet that complies with §1194.21(a) through (l).	Not Applicable	
(n) When electronic forms are designed to be completed on-line, the form shall allow people using Assistive Technology to access the information, field elements, and functionality required for completion and submission of the form, including all directions and cues.	Not Applicable	
(o) A method shall be provided that permits users to skip repetitive navigation links.	Not Applicable	



(p) When a timed response is required, the user shall be alerted and given sufficient time to indicate more time is required.	Not Applicable	
---	----------------	--

Note to 1194.22: The Board interprets paragraphs (a) through (k) of this section as consistent with the following priority 1 Checkpoints of the Web Content Accessibility Guidelines 1.0 (WCAG 1.0) (May 5 1999) published by the Web Accessibility Initiative of the World Wide Web Consortium: Paragraph (a) - 1.1, (b) - 1.4, (c) - 2.1, (d) - 6.1, (e) - 1.2, (f) - 9.1, (g) - 5.1, (h) - 5.2, (i) - 12.1, (j) - 7.1, (k) - 11.4.

[Return to the top of the page. ../AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html](http://AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html)

## **Section 1194.23 Telecommunications Products**

### **– Detail**

## **VPAT™**

## **Voluntary Product Accessibility Template®**

<b>Criteria</b>	<b>Supporting Features</b>	<b>Remarks and explanations</b>
(a) Telecommunications products or systems which provide a function allowing voice communication and which do not themselves provide a TTY functionality shall provide a standard non-acoustic connection point for TTYs. Microphones shall be capable of being turned on and off to allow the user to intermix speech with TTY use.	Not Applicable	
(b) Telecommunications products which include voice communication functionality shall support all commonly used cross-manufacturer non-proprietary standard TTY signal protocols.	Not Applicable	

<p>(c) Voice mail, auto-attendant, and interactive voice response telecommunications systems shall be usable by TTY users with their TTYs.</p>	<p>Not Applicable</p>	
<p>(d) Voice mail, messaging, auto-attendant, and interactive voice response telecommunications systems that require a response from a user within a time interval, shall give an alert when the time interval is about to run out, and shall provide sufficient time for the user to indicate more time is required.</p>	<p>Not Applicable</p>	
<p>(e) Where provided, caller identification and similar telecommunications functions shall also be available for users of TTYs, and for users who cannot see displays.</p>	<p>Not Applicable</p>	
<p>(f) For transmitted voice signals, telecommunications products shall provide a gain adjustable up to a minimum of 20 dB. For incremental volume control, at least one intermediate step of 12 dB of gain shall be provided.</p>	<p>Not Applicable</p>	
<p>(g) If the telecommunications product allows a user to adjust the receive volume, a function shall be provided to automatically reset the volume to the default level after every use.</p>	<p>Not Applicable</p>	
<p>(h) Where a telecommunications product delivers output by an audio transducer which is normally held up to the ear, a means for effective magnetic wireless coupling to hearing technologies shall be provided.</p>	<p>Not Applicable</p>	
<p>(i) Interference to hearing technologies (including hearing aids, cochlear implants, and assistive listening devices) shall be</p>	<p>Not Applicable</p>	

<p>reduced to the lowest possible level that allows a user of hearing technologies to utilize the telecommunications product.</p>		
<p>(j) Products that transmit or conduct information or communication, shall pass through cross-manufacturer, non-proprietary, industry-standard codes, translation protocols, formats or other information necessary to provide the information or communication in a usable format. Technologies which use encoding, signal compression, format transformation, or similar techniques shall not remove information needed for access or shall restore it upon delivery.</p>	<p>Not Applicable</p>	
<p>(k)(1) Products which have mechanically operated controls or keys shall comply with the following: Controls and Keys shall be tactilely discernible without activating the controls or keys.</p>	<p>Not Applicable</p>	
<p>(k)(2) Products which have mechanically operated controls or keys shall comply with the following: Controls and Keys shall be operable with one hand and shall not require tight grasping, pinching, twisting of the wrist. The force required to activate controls and keys shall be 5 lbs. (22.2N) maximum.</p>	<p>Not Applicable</p>	
<p>(k)(3) Products which have mechanically operated controls or keys shall comply with the following: If key repeat is supported, the delay before repeat shall be adjustable to at least 2 seconds. Key repeat rate shall be adjustable to 2 seconds per character.</p>	<p>Not Applicable</p>	
<p>(k)(4) Products which have mechanically operated controls or keys shall comply with the following:</p>	<p>Not Applicable</p>	

The status of all locking or toggle controls or keys shall be visually discernible, and discernible either through touch or sound.		
--	--	--

[Return to the top of the page. ../AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html](..../AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html)

**Section 1194.24 Video and Multi-media  
Products – Detail**

**VPAT™**

**Voluntary Product Accessibility Template®**

<b>Criteria</b>	<b>Supporting Features</b>	<b>Remarks and explanations</b>
a) All analog television displays 13 inches and larger, and computer equipment that includes analog television receiver or display circuitry, shall be equipped with caption decoder circuitry which appropriately receives, decodes, and displays closed captions from broadcast, cable, videotape, and DVD signals. As soon as practicable, but not later than July 1, 2002, widescreen digital television (DTV) displays measuring at least 7.8 inches vertically, DTV sets with conventional displays measuring at least 13 inches vertically, and stand-alone DTV tuners, whether or not	Not Applicable	

<p>they are marketed with display screens, and computer equipment that includes DTV receiver or display circuitry, shall be equipped with caption decoder circuitry which appropriately receives, decodes, and displays closed captions from broadcast, cable, videotape, and DVD signals.</p>		
<p>(b) Television tuners, including tuner cards for use in computers, shall be equipped with secondary audio program playback circuitry.</p>	<p>Not Applicable</p>	
<p>(c) All training and informational video and multimedia productions which support the agency's mission, regardless of format, that contain speech or other audio information necessary for the comprehension of the content, shall be open or closed captioned.</p>	<p>Not Applicable</p>	
<p>(d) All training and informational video and multimedia productions which support the agency's mission, regardless of format, that contain visual information necessary for the comprehension of the content, shall be audio described.</p>	<p>Not Applicable</p>	
<p>(e) Display or presentation of alternate text presentation or audio</p>	<p>Not Applicable</p>	

descriptions shall be user-selectable unless permanent.

[Return to the top of the page. ../AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html](http://AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html)

## **Section 1194.25 Self-Contained, Closed Products – Detail**

### **VPAT™**

### **Voluntary Product Accessibility Template®**

<b>Criteria</b>	<b>Supporting Features</b>	<b>Remarks and explanations</b>
(a) Self contained products shall be usable by people with disabilities without requiring an end-user to attach Assistive Technology to the product. Personal headsets for private listening are not Assistive Technology.	Support	Users with computers can connect to the Arista Ethernet switch either via a console port or through a telnet (SSH) session that is compatible with assistive technology
(b) When a timed response is required, the user shall be alerted and given sufficient time to indicate more time is required.	Not Applicable	No instance of required timed responses
(c) Where a product utilizes touchscreens or contact-sensitive controls, an input method shall be provided that complies with §1194.23 (k) (1) through (4).	Not Applicable	
(d) When biometric forms of user identification or	Not Applicable	No instances of biometric forms of user

<p>control are used, an alternative form of identification or activation, which does not require the user to possess particular biological characteristics, shall also be provided.</p>		<p>identification or control</p>
<p>(e) When products provide auditory output, the audio signal shall be provided at a standard signal level through an industry standard connector that will allow for private listening. The product must provide the ability to interrupt, pause, and restart the audio at anytime.</p>	<p>Not Applicable</p>	<p>No instances of audio or listening features</p>
<p>(f) When products deliver voice output in a public area, incremental volume control shall be provided with output amplification up to a level of at least 65 dB. Where the ambient noise level of the environment is above 45 dB, a volume gain of at least 20 dB above the ambient level shall be user selectable. A function shall be provided to automatically reset the volume to the default level after every use.</p>	<p>Not Applicable</p>	<p>No instances of audio or listening features</p>
<p>(g) Color coding shall not be used as the only means of conveying information, indicating an action, prompting a response, or distinguishing a visual element.</p>	<p>Supports</p>	<p>On the physical Arista Networks Ethernet switches, LED lights are used to indicate normal operations (green), or blinking / flashing LED lights intervention is required ( yellow or red).</p>

		The Command line interface does use blinking or flashing lights.
(h) When a product permits a user to adjust color and contrast settings, a range of color selections capable of producing a variety of contrast levels shall be provided.	Not Applicable	No instances of color or contrast settings
(i) Products shall be designed to avoid causing the screen to flicker with a frequency greater than 2 Hz and lower than 55 Hz.	Not Applicable	On the physical Arista Networks Ethernet switches, LED lights are used to indicate normal operations (green), or blinking / flashing LED lights intervention is required ( yellow or red). The Command line interface does use technology that causes a computer screen to flicker
(j) (1) Products which are freestanding, non-portable, and intended to be used in one location and which have operable controls shall comply with the following: The position of any operable control shall be determined with respect to a vertical plane, which is 48 inches in length, centered on the operable control, and at the maximum protrusion of the product within the 48 inch length on products which are freestanding, non-portable, and intended to be used in one location and which	Supports	The Arista Networks Ethernet switch is intended to be rack mounted. The dependency on meeting this requirement is the location in which the switch is placed in the rack.



have operable controls.		
(j)(2) Products which are freestanding, non-portable, and intended to be used in one location and which have operable controls shall comply with the following: Where any operable control is 10 inches or less behind the reference plane, the height shall be 54 inches maximum and 15 inches minimum above the floor.	Supports	The Arista Networks Ethernet switch is intended to be rack mounted. The dependency on meeting this requirement is the location in which the switch is placed in the rack.
(j)(3) Products which are freestanding, non-portable, and intended to be used in one location and which have operable controls shall comply with the following: Where any operable control is more than 10 inches and not more than 24 inches behind the reference plane, the height shall be 46 inches maximum and 15 inches minimum above the floor.	Supports	The Arista Networks Ethernet switch is intended to be rack mounted. The dependency on meeting this requirement is the location in which the switch is placed in the rack.
(j)(4) Products which are freestanding, non-portable, and intended to be used in one location and which have operable controls shall comply with the following: Operable controls shall not be more than 24 inches behind the reference plane.	Supports	The Arista Networks Ethernet switch is intended to be rack mounted. The dependency on meeting this requirement is the location in which the switch is placed in the rack.

[Return to the top of the page. ../AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html](..../AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html)

**Section 1194.26 Desktop and Portable  
Computers – Detail**

**VPAT™**

**Voluntary Product Accessibility Template®**

<b>Criteria</b>	<b>Supporting Features</b>	<b>Remarks and explanations</b>
(a) All mechanically operated controls and keys shall comply with §1194.23 (k) (1) through (4).	Not Applicable	
(b) If a product utilizes touchscreens or touch-operated controls, an input method shall be provided that complies with §1194.23 (k) (1) through (4).	Not Applicable	
(c) When biometric forms of user identification or control are used, an alternative form of identification or activation, which does not require the user to possess particular biological characteristics, shall also be provided.	Not Applicable	
(d) Where provided, at least one of each type of expansion slots, ports and connectors shall comply with publicly available industry standards	Not Applicable	

[Return to the top of the page. ../AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html](..../AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html)

## **Section 1194.31 Functional Performance**

### **Criteria – Detail**

## **VPAT™**

## **Voluntary Product Accessibility Template®**

<b>Criteria</b>	<b>Supporting Features</b>	<b>Remarks and explanations</b>
<p>(a) At least one mode of operation and information retrieval that does not require user vision shall be provided, or support for Assistive Technology used by people who are blind or visually impaired shall be provided.</p>	<p>Support with Exceptions</p>	<p>Arista Networks does not recommend a person with impaired vision to connect an Arista Networks Ethernet switch to either an AC or DC power source as the action may pose a safety risk.</p> <p>For software administration, the Arista Networks Ethernet switch may be managed through the Extensible Operating System Command Line Interface.</p>
<p>(b) At least one mode of operation and information retrieval that does not require visual acuity greater than 20/70 shall be provided in audio and enlarged print output working together or independently, or support for Assistive Technology used by people who are visually impaired shall be provided.</p>	<p>Support with Exceptions</p>	<p>Arista Networks does not recommend a person with impaired vision to connect an Arista Networks Ethernet switch to either an AC or DC power source as the action may pose a safety risk.</p> <p>For software administration, the Arista Networks Ethernet switch may be managed through the Extensible Operating System</p>

		Command Line Interface.
(c) At least one mode of operation and information retrieval that does not require user hearing shall be provided, or support for Assistive Technology used by people who are deaf or hard of hearing shall be provided	Not Applicable	No audio features in the CLI
(d) Where audio information is important for the use of a product, at least one mode of operation and information retrieval shall be provided in an enhanced auditory fashion, or support for assistive hearing devices shall be provided.	Not Applicable	No audio features in the CLI
(e) At least one mode of operation and information retrieval that does not require user speech shall be provided, or support for Assistive Technology used by people with disabilities shall be provided.	Not Applicable	No audio features in the CLI
(f) At least one mode of operation and information retrieval that does not require fine motor control or simultaneous actions and that is operable with limited reach and strength shall be provided.	Support with exceptions	Individuals with limited reach, strength and fine motor control restrictions may find it difficult to insert data cables ( ie RJ46, twinax, fiber cables) into the Ethernet ports. Individuals with limited reach, strength and fine motor control restrictions may find it difficult to insert line cards into the Ethernet switch and / or placing the Ethernt switch into a

		<p>rack.</p> <p>For software administration, the Arista Networks Ethernet switch may be managed through the Extensible Operating System Command Line Interface</p>
--	--	--

[Return to the top of the page. ../AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html](http://AppData/Local/Microsoft/Windows/Local Settings/Temporary Internet Files/OLK42/VPAT.html)

**Section 1194.41 Information, Documentation  
and Support – Detail**

**VPAT™**

**Voluntary Product Accessibility Template®**

<b>Criteria</b>	<b>Supporting Features</b>	<b>Remarks and explanations</b>
(a) Product support documentation provided to end-users shall be made available in alternate formats upon request, at no additional charge	Supports	Accessible documentation is available through the Arista Networks Technical Assistance Center (TAC) upon request.
(b) End-users shall have access to a description of the accessibility and compatibility features of products in alternate formats or alternate methods upon request, at no additional charge.	Supports	Accessible documentation is available through the Arista Networks Technical Assistance Center (TAC) upon request.
(c) Support services for products shall accommodate the communication needs of	Supports	Customers may reach the Technical Assistance Center (TAC) via telephone, E-Mail, or

end-users with disabilities.		Web Form.
------------------------------	--	-----------

[Return to the top of the page.](#)